Office IP20 600x600 - Wall mount



Description

The Wall Office Series is the economical and safe way to house IT equipment. It offers flexibility to build up distribution points that will allow to position the floor wiring and IT equipment even where space is limited.

Technical features

The modular, load-bearing structure, is made of 2.0 & 1.5 mm-thick steel sheet to guarantee exceptional strength. Assembly and disassembly of the complete structure is straightforward and quick. The Rack Cabinet is supplied fully assembled. The front door is made of tempered glass fitted with a key lock. Side panels are removable and fitted with a quarter-turn lock. Upon request, side panels can be supplied with a key lock.


Technical Specifications

Structure	Assemblable/disassemblable by means of screws	Cable entry	Pre-cut base and roof
Material	2.0 mm steel sheet / 1.5 mm	Roof ventilation	Natural or forced (up to 1 fan)
Static load	80 kg	Color	Epoxy powder Black RAL 9005
19" Uprights	4 pcs, t=2.0 mm, 19" as per IEC 60297-1-2	Protection degree	IP20 according to EN 60529
Front door	Glass door, t=4.0 mm, tempered as per EN 12150-1	Conformity	RoHS 2 Directive 2011/65 / EU
Side panels	Removable, 1.0 mm steel sheet, with 1/4 turn lock	Warranty	2 years


Office IP20 600x600 - Wall mount

Construction Drawing

Assemblable/disassemblable supporting structure
Depth-adjustable 19" uprights
Glass door with lock
Removable side panels
Cable entry from base and roof
Allows the installation of ventilation unit
Omega-type reinforcement and cable fixing

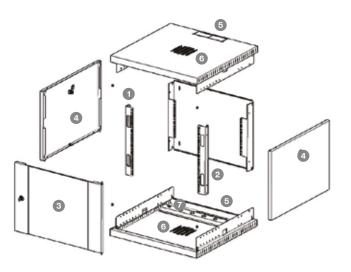

Dimensions

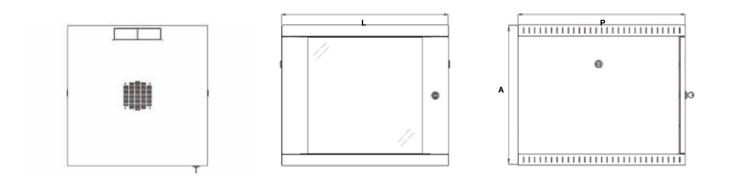

Versions

P/N	Description	Units	Height	Width	Depth	Color
000179-I	Office IP20 with glass door	12	637 mm	600 mm	600 mm	Black, RAL 9005
000180-l	Office IP20 with glass door	16	815 mm	600 mm	600 mm	Black, RAL 9005
309149	Office IP20 with glass door	20	993 mm	600 mm	600 mm	Black, RAL 9005

Other dimensions and configurations on request.

Accessories

P/N	Description	Height	Width	Depth	Color
309090	Single fan 220V with Schuko plug	120 mm	120 mm	38 mm	Black, RAL 9005