

Office IP20 600x526 - Wall mount



Description

The Wall Office Series is the economical and safe way to house IT equipment. It offers flexibility to build up distribution points that will allow to position the floor wiring and IT equipment even where space is limited.

Technical features

The modular, load-bearing structure, is made of 2.0 & 1.5 mm-thick steel sheet to guarantee exceptional strength. Assembly and disassembly of the complete structure is straightforward and quick. The Rack Cabinet is supplied fully assembled. The front door is made of tempered glass fitted with a key lock. Side panels are removable and fitted with a quarter-turn lock. Upon request, side panels can be supplied with a key lock.


Technical Specifications

Structure	Assemblable/disassemblable by means of screws	Cable entry	Pre-cut base and roof
Material	2.0 and 1.5 mm steel sheet	Roof ventilation	Natural or forced (up to 1 fan)
Static load	80 kg	Color	Epoxy powder Black RAL 9005
19" Uprights	4 pcs, t=2.0 mm, 19" as per IEC 60297-1-2	Protection degree	IP20 according to EN 60529
Front door	Glass door, t=4.0 mm, tempered as per EN 12150-1	Conformity	RoHS 2 Directive 2011/65 / EU
Side panels	Removable, 1.0 mm steel sheet, with ¼ turn lock	Warranty	2 years


Office IP20 600x526 - Wall mount

Construction Drawing

- ① Assemblable/disassemblable supporting structure
- ② Depth-adjustable 19" uprights
- ③ Glass door with lock
- ④ Removable side panels
- ⑤ Cable entry from base and roof
- ⑥ Allows the installation of ventilation unit
- ⑦ Omega-type reinforcement and cable fixing

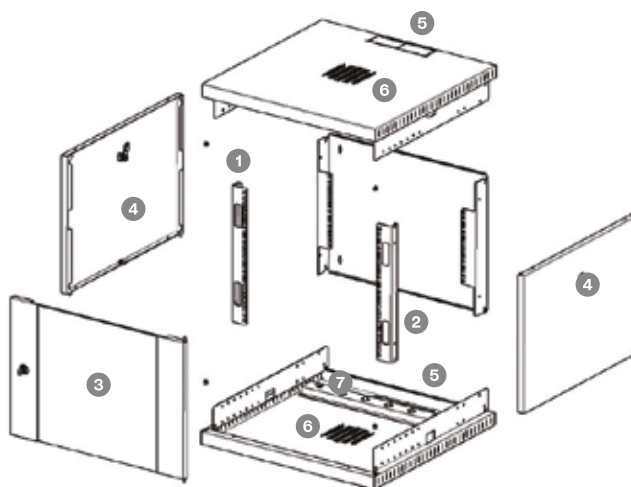

Dimensions

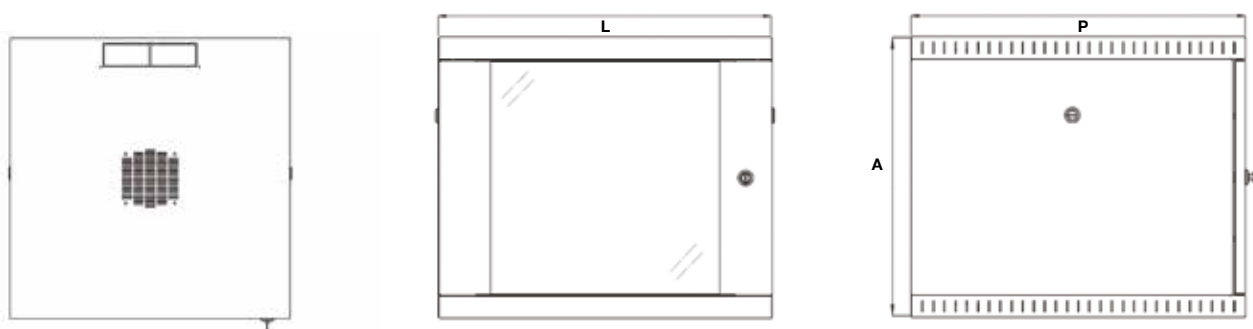

Versions

P/N	Description	Units	Height	Width	Depth	Color
309048	Office IP20 with glass door	9	504 mm	600 mm	526 mm	Black, RAL 9005
309049	Office IP20 with glass door	12	637 mm	600 mm	526 mm	Black, RAL 9005
309050	Office IP20 with glass door	16	815 mm	600 mm	526 mm	Black, RAL 9005

Other dimensions and configurations on request.

Accessories

P/N	Description	Height	Width	Depth	Color
309148	Single fan 220V with Schuko plug	120 mm	120 mm	38 mm	Black, RAL 9005