

# Network IP20 800x800 - Free standing



## Description

The Network Series is specifically designed for use in structured cabling and networking projects. Their versatility guarantees the necessary flexibility, both in the creation of a star point and definition of distribution points necessary for the positioning of the IT equipment.

## Technical features

The modular structure, is made of four (4) load-bearing, steel sheet, 2.0 mm-thick, and rounded-corner profiles, to guarantee exceptional strength. Assembly and disassembly of the complete structure is straightforward and quick. The Rack can be supplied either fully assembled or in flat-pack packaging. The front door is made of tempered glass fitted with a swivel handle lock. Side and rear panels are removable and fitted with quarter-turn lock. Upon request, side panels can be supplied with key lock.


## Technical Specifications

<b>Structure</b>	Modular and disassemblable	<b>Levelling feet</b>	4 pcs of M10x35 mm
<b>Material</b>	2.0 mm steel sheet	<b>Cable entry</b>	Pre-cut, base and roof (optional brush)f
<b>Static load</b>	800 kg	<b>Roof ventilation</b>	Natural or forced (up to four fans)
<b>19" Uprights</b>	4 pcs, C=2.00 mm, 19" as per IEC 60297-1-2	<b>Color</b>	Epoxy powder Black RAL 9005
<b>Front door</b>	With 4.0 mm glass, tempered as per EN 12150-1	<b>Protection degree</b>	IP20 as per EN 60529
<b>Side panels</b>	Removable, 1.0 mm steel sheet, with ¼ turn lock	<b>Conformity</b>	RoHS 2 Directive 2011/65 / EU
<b>Rear panel</b>	Removable, 1.0 mm steel sheet, with ¼ turn lock	<b>Warranty</b>	2 years


# Network IP20 800x800 - Free standing

## Construction Drawing

- ① Modular and disassemblable structure
- ② Depth-adjustable 19" uprights
- ③ Glass door with swivel handle
- ④ Removable side and rear panels
- ⑤ Cable entry from base and roof
- ⑥ Allows the installation of ventilation
- ⑦ Levelling feet

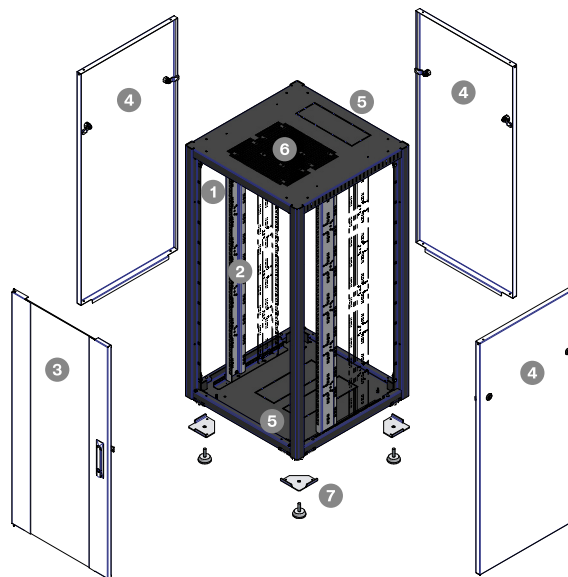

## Dimensions

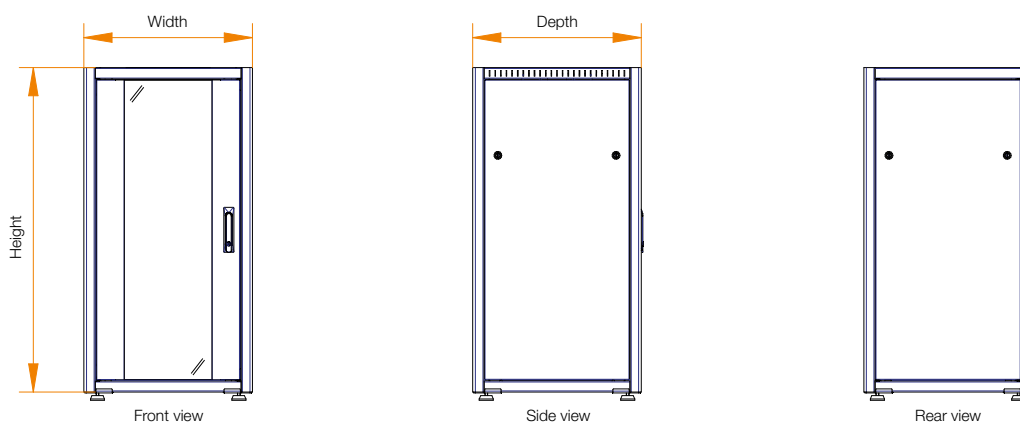

## Versions

P/N	Description	Units	Height	Width	Depth	Color
309057-SZ	Network IP20 with glass door	24	1156 mm	800 mm	800 mm	Black, RAL 9005
309061-SZ	Network IP20 with glass door	34	1601 mm	800 mm	800 mm	Black, RAL 9005
309065-SZ	Network IP20 with glass door	42	1957 mm	800 mm	800 mm	Black, RAL 9005
309069-SZ	Network IP20 with glass door	48	2224 mm	800 mm	800 mm	Black, RAL 9005

Other dimensions and configurations are available on request.

## Accessories

P/N	Description	Height	Width	Depth	Color
309342	Brush for the cable entry (2 pcs)	10.4 mm	50 mm	301 mm	Black, RAL 9005
309333	Plinth kit with sealing flanges	100 mm	800 mm	800 mm	Black, RAL 9005