


# Server IP20 600x1000 - Free standing

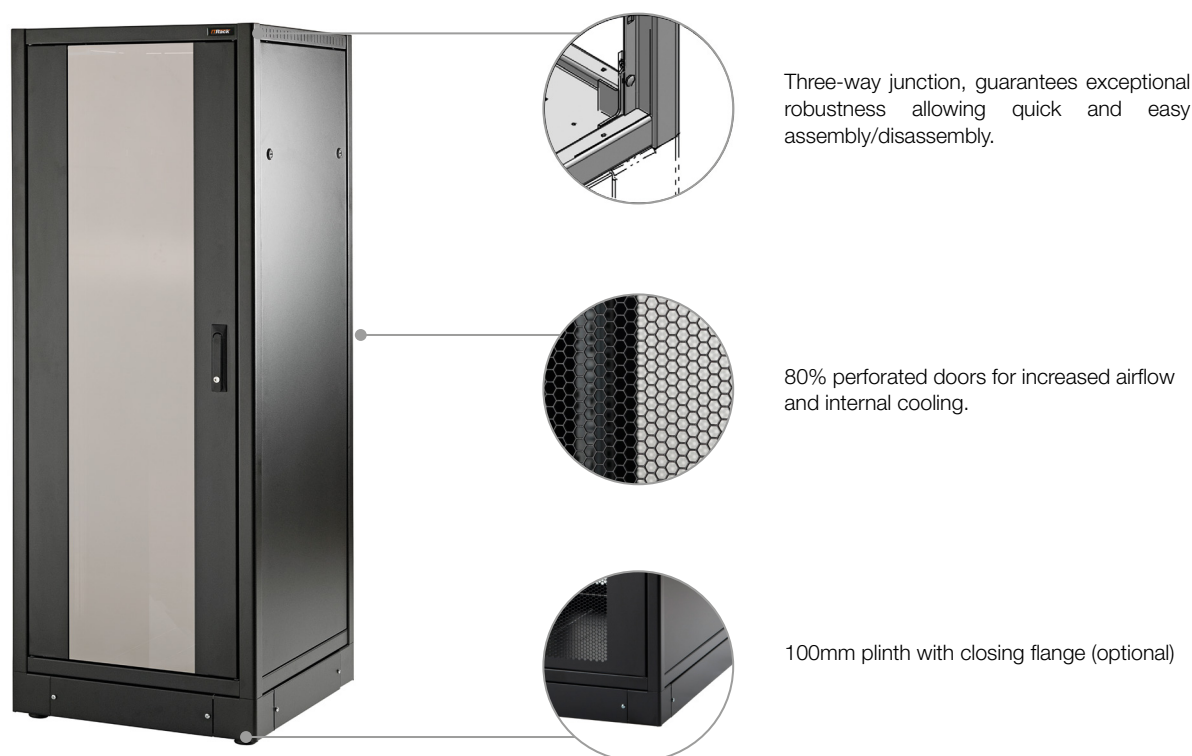

## Description

The Server Series has been designed to use in Data Centers of any size. Thanks to its robustness, this cabinet can support considerable loads to install servers, uninterruptible power supplies and devices of any manufacturer.

## Technical features

The modular structure, is made of four (4), load-bearing, steel sheet, 2.0 mm-thick and rounded-corner profiles, to guarantee exceptional strength. Assembly and disassembly of the complete structure is straightforward and quick. The Rack can be supplied either fully assembled or in flat-pack packaging. Racks of this Series are available with tempered glass front door and 80% perforated rear door, both fitted with a swivel handle lock with key. Side panels are removable and fitted with a quarter-turn lock. On request, they can be supplied with lock with key.


## Technical Specifications

<b>Structure</b>	Modular and disassemblable	<b>Levelling feet</b>	4 pcs of M10x35 mm
<b>Material</b>	2.0 mm steel sheet	<b>Cable entry</b>	Pre-cut, base and roof (optional brush)
<b>Static load</b>	1000 kg	<b>Roof ventilation</b>	Natural or forced (up to four fans)
<b>19" Uprights</b>	4 pcs, C=2.00 mm, 19" as per IEC 60297-1-2	<b>Color</b>	Epoxy powder Black RAL 9005
<b>Front door</b>	With 4.0 mm glass, tempered as per EN 12150-1	<b>Protection degree</b>	IP20 as per EN 60529
<b>Rear door</b>	Perforated 80%	<b>Conformity</b>	RoHS 2 Directive 2011/65 / EU
<b>Side panels</b>	Removable, 1.0 mm steel sheet, with ¼ turn lock	<b>Warranty</b>	2 years


# Server IP20 600x1000 - Free standing

## Construction Drawing

- 1 Modular and disassemblable structure
- 2 Depth-adjustable 19" uprights
- 3 Glass front door with swivel handle
- 4 80% perforated rear door with swivel handle
- 5 Removable side panels
- 6 Cable entry from base and roof
- 7 Allows the installation of ventilation
- 8 Levelling feet

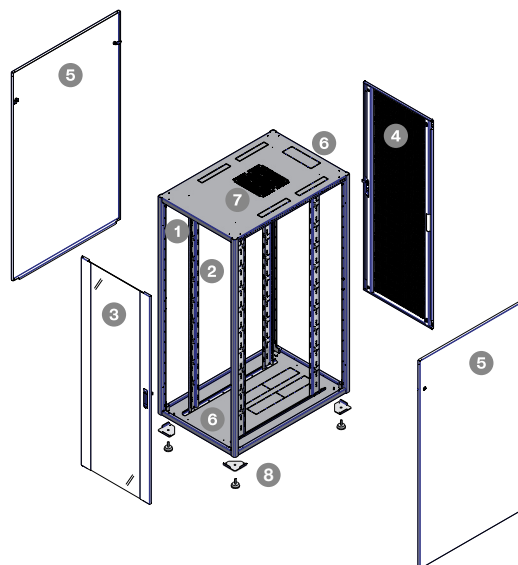

## Dimensions

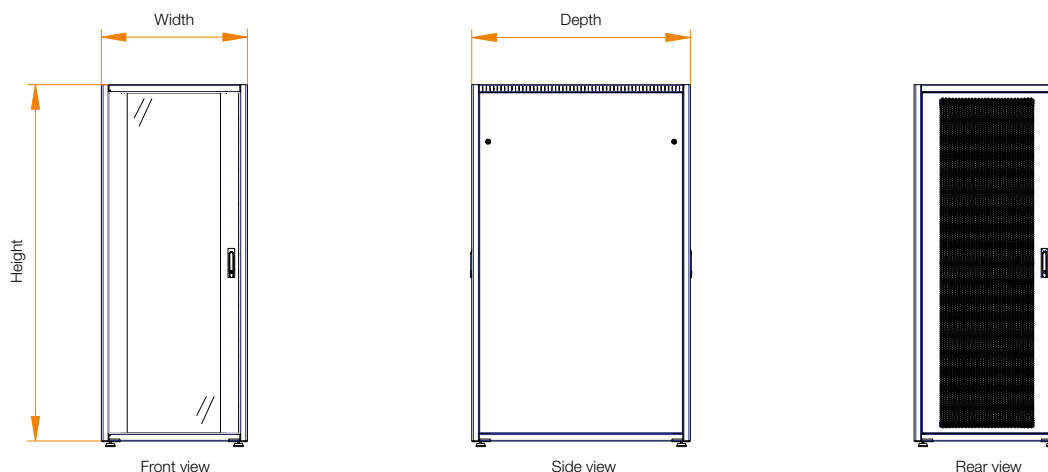

## Versions

P/N	Description	Units	Height	Width	Depth	Color
309070-AV-SZ	Server IP20 with glass and perforated doors	24	1156 mm	600 mm	1000 mm	Black, RAL 9005
309072-AV-SZ	Server IP20 with glass and perforated doors	34	1601 mm	600 mm	1000 mm	Black, RAL 9005
309074-AV-SZ	Server IP20 with glass and perforated doors	42	1957 mm	600 mm	1000 mm	Black, RAL 9005
309076-AV-SZ	Server IP20 with glass and perforated doors	48	2224 mm	600 mm	1000 mm	Black, RAL 9005

Other dimensions and configurations are available on request.

## Accessories

P/N	Description	Height	Width	Depth	Color
309342	Brush for the cable entry (2 pcs)	10.4 mm	50 mm	301 mm	Black, RAL 9005
309334	Plinth kit with sealing flanges	100 mm	600 mm	1000 mm	Black, RAL 9005