


# RS Élite IP20 600/800x1000 - Free standing

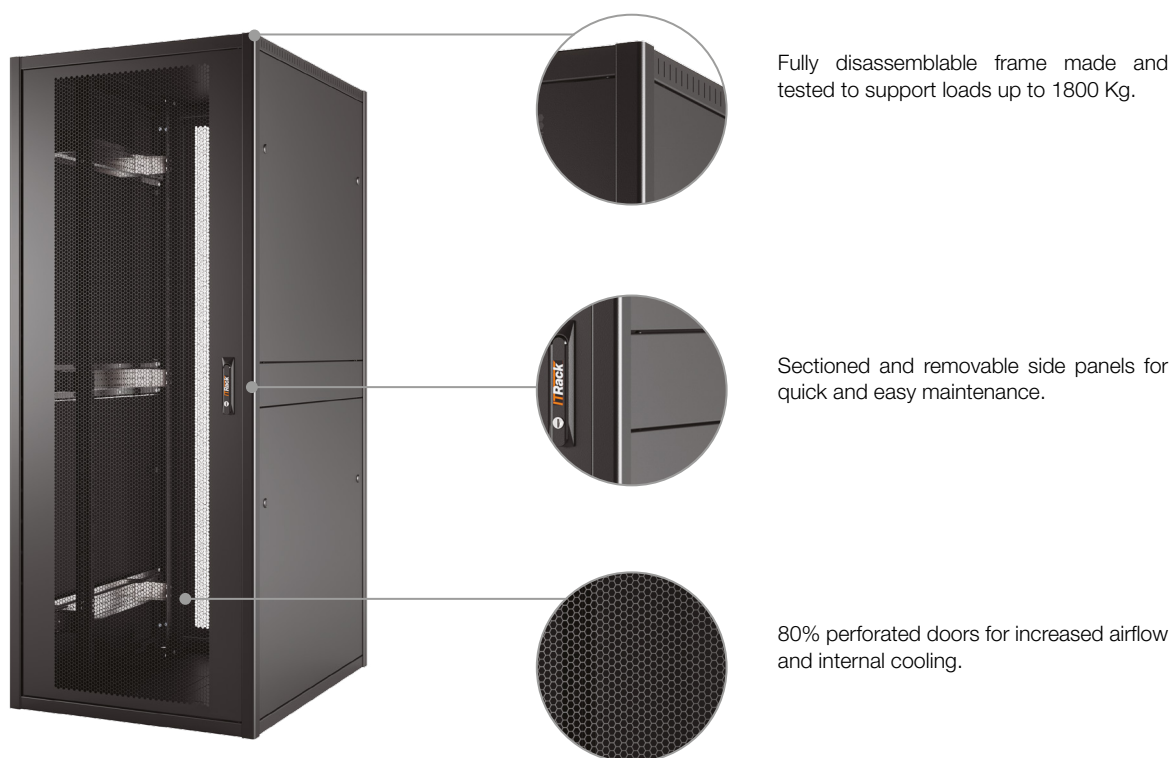

## Description

The RS Élite Series has been designed to accommodate high-density servers. These cabinets ensure protection, connection, cooling and power supply, offering significant savings on infrastructure costs by allowing the enhancement of data processing in simple, fast, and space-saving manner. This series of 19" Rack Cabinets is ideal for creating the infrastructures typically required in Data Centre, Micro Data Centre, Datacom, as well as IT & Networks.

## Technical features

The modular structure is made using 3.0 mm three-way joints welded to the base and roof assembled with 4 supporting profiles in 2.0 mm thick steel sheet. Cabinets are equipped with reversible single, or mesh doors with 80% perforation, swivel handle with key, 4 vertical 19" uprights with numbered units (RU's) and adjustable in depth. Cabinets are supplied fully assembled, but on request, they can be available in flat pack.

## Technical specifications


<b>Structure</b>	Modular and disassemblable	<b>Cable entry</b>	Pre-cut, in base and roof (optional brush)
<b>Material</b>	2.0 mm steel sheet	<b>PDU bracket</b>	2xPDU (optional)
<b>Static load</b>	1800 Kg	<b>Ventilation</b>	Natural or forced (up to 4 fans)
<b>19" Uprights</b>	4 pcs, C=2.00 mm, 19" as per IEC 60297-1-2	<b>Color</b>	Black RAL 9005*
<b>Front door</b>	80% perforated	<b>Coating</b>	Epoxy powder
<b>Rear door</b>	80% perforated	<b>Degree of protection</b>	IP20 according to EN 60529
<b>Side panels</b>	Sectioned and removable with 1.0 mm ¼-turn lock	<b>Conformity</b>	RoHS 2 Directive 2011/65 /EU
<b>Levelling feet</b>	M10x43 mm	<b>Warranty</b>	2 years

\*Available in white RAL 9016 on request


# RS Élite IP20 600/800x1000 - Free standing

## Construction drawing

- 1 Modular and disassemblable structure
- 2 Depth adjustable 19"uprights with numbered units (RU's)
- 3 80% perforated door with swivel handle
- 4 80% perforated door with swivel handle
- 5 Sectioned and removable side panels
- 6 Cable entry from base and roof
- 7 Allows the installation of ventilation kit
- 8 Levelling feet

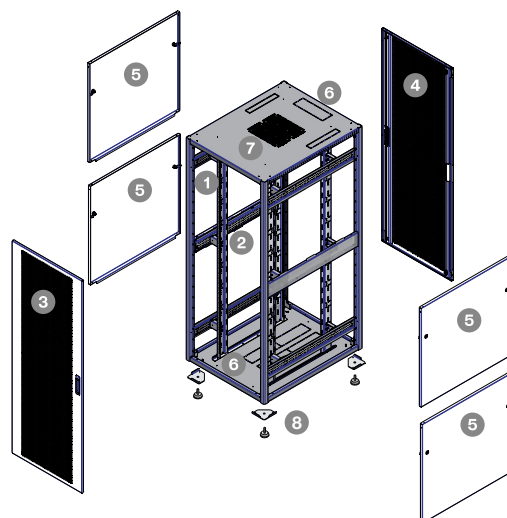

## Dimensions

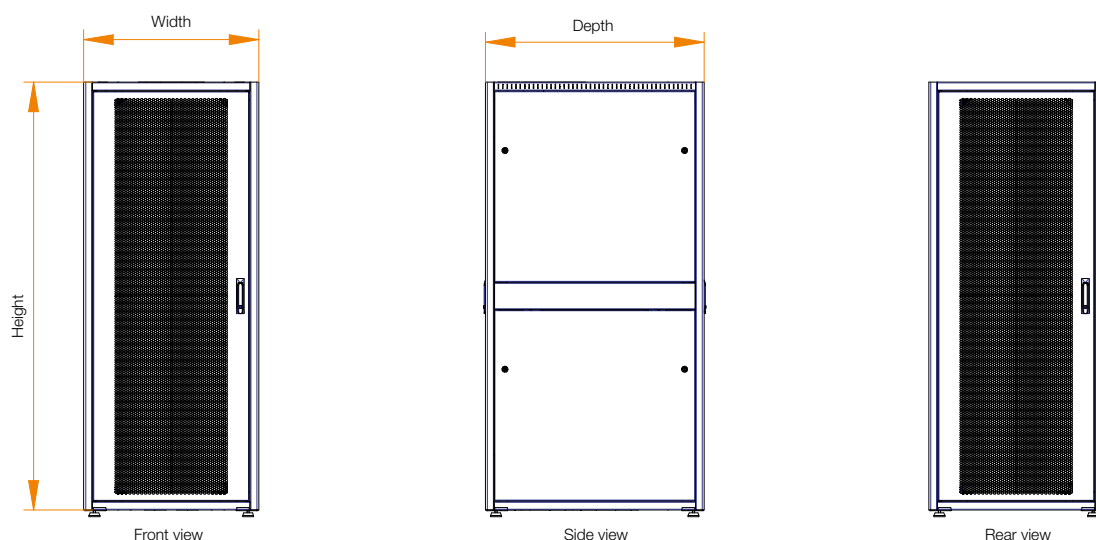

## Versions

P/N	Description	Units	Height	Width	Depth	Color
309307	RS Élite floor-standing with perforated doors	42	1957 mm	600 mm	1000 mm	Black, RAL 9005
309309	RS Élite floor-standing with perforated doors	48	2224 mm	600 mm	1000 mm	Black, RAL 9005
309308	RS Élite floor-standing with perforated doors	42	1957 mm	800 mm	1000 mm	Black, RAL 9005
309310	RS Élite floor-standing with perforated doors	48	2224 mm	800 mm	1000 mm	Black, RAL 9005

Other dimensions and configurations are available on request.

## Accessories

P/N	Description	Height	Width	Depth	Color
309342	Brush for the cable entry (2 pcs)	10.4 mm	50 mm	301 mm	Black, RAL 9005
309338	Bracket for 2 PDU's for 42U/48U	1760 mm	29 mm	190.5 mm	Black, RAL 9005