


# RS Élite IP20 600/800x1000 - Free standing

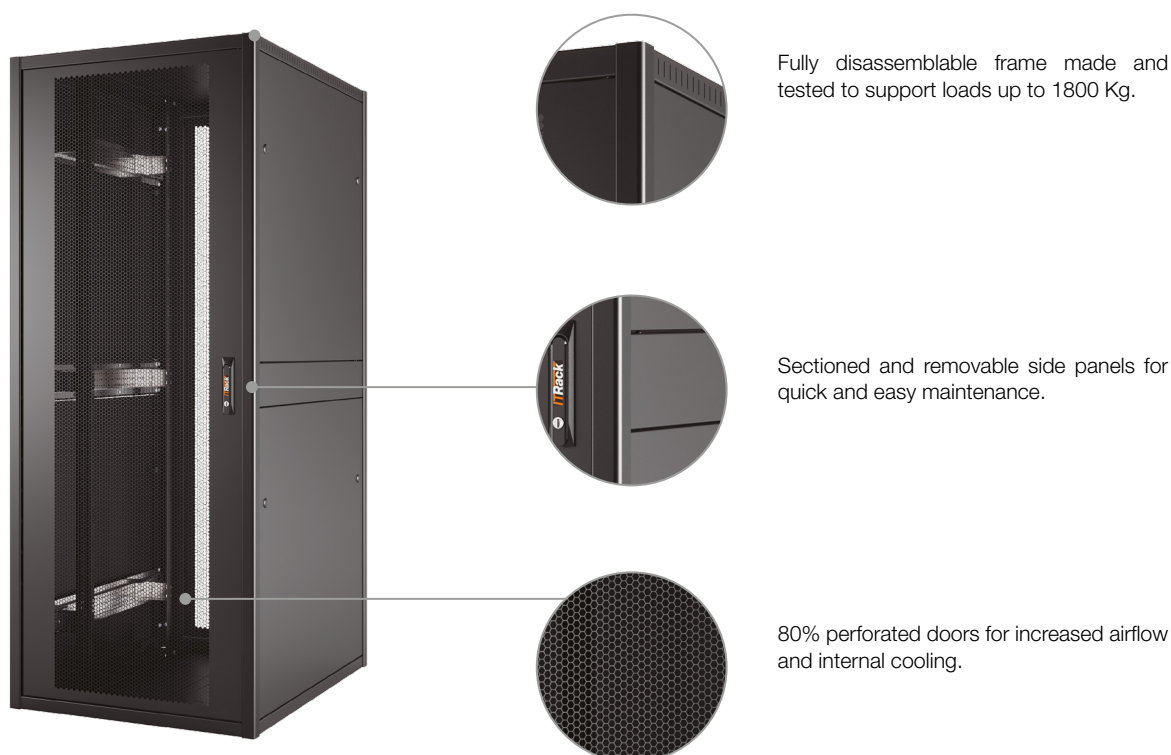

## Description

The RS Élite Series has been designed to accommodate high-density servers. These cabinets ensure protection, connection, cooling and power supply, offering significant savings on infrastructure costs by allowing the enhancement of data processing in simple, fast, and space-saving manner. This series of 19" Rack Cabinets is ideal for creating the infrastructures typically required in Data Centre, Micro Data Centre, Datacom, as well as IT & Networks.

## Technical features

The modular structure is made using 3.0 mm three-way joints welded to the base and roof assembled with 4 supporting profiles in 2.0 mm thick steel sheet. Cabinets are equipped with reversible single, or mesh doors with 80% perforation, swivel handle with key, 4 vertical 19" uprights with numbered units (RU's) and adjustable in depth. Cabinets are supplied fully assembled, but on request, they can be available in flat pack.

## Technical specifications


|                       |                                                 |                             |                                            |
|-----------------------|-------------------------------------------------|-----------------------------|--------------------------------------------|
| <b>Structure</b>      | Modular and disassemblable                      | <b>Cable entry</b>          | Pre-cut, in base and roof (optional brush) |
| <b>Material</b>       | 2.0 mm steel sheet                              | <b>PDU bracket</b>          | 2xPDU (optional)                           |
| <b>Static load</b>    | 1800 Kg                                         | <b>Ventilation</b>          | Natural or forced (up to 4 fans)           |
| <b>19" Uprights</b>   | 4 pcs, C=2.00 mm, 19" as per IEC 60297-1-2      | <b>Color</b>                | Black RAL 9005*                            |
| <b>Front door</b>     | 80% perforated                                  | <b>Coating</b>              | Epoxy powder                               |
| <b>Rear door</b>      | Split perforated 80%                            | <b>Degree of protection</b> | IP20 according to EN 60529                 |
| <b>Side panels</b>    | Sectioned and removable with 1.0 mm ¼-turn lock | <b>Conformity</b>           | RoHS 2 Directive 2011/65 /EU               |
| <b>Levelling feet</b> | M10x43 mm                                       | <b>Warranty</b>             | 2 years                                    |

\*Available in white RAL 9016 on request


# RS Élite IP20 600/800x1000 - Free standing

## Construction drawing

- 1 Modular and disassemblable structure
- 2 Depth adjustable 19" uprights with numbered units (RU's)
- 3 80% perforated door with swivel handle
- 4 80% perforated split door with swivel handle
- 5 Sectioned and removable side panels
- 6 Cable entry from base and roof
- 7 Allows the installation of ventilation kit
- 8 Levelling feet

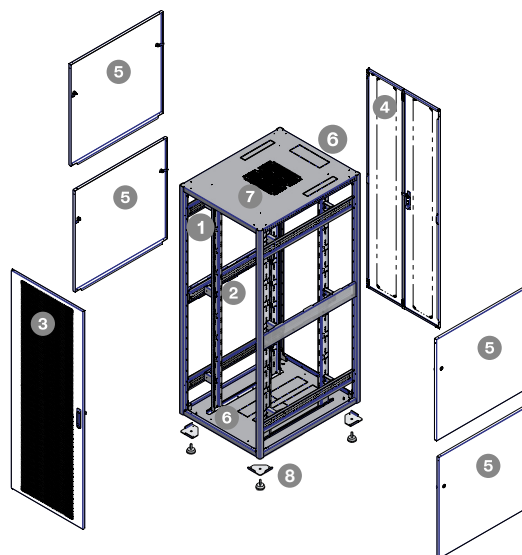

## Dimensions

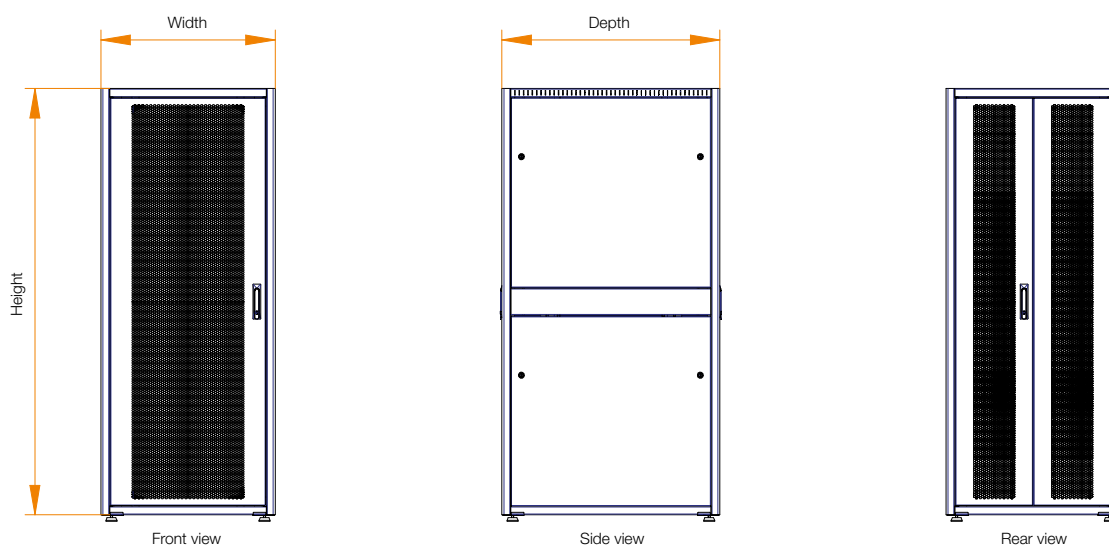

## Versions

| P/N    | Description                                   | Units | Height  | Width  | Depth   | Color           |
|--------|-----------------------------------------------|-------|---------|--------|---------|-----------------|
| 309311 | RS Élite floor-standing with perforated doors | 42    | 1957 mm | 600 mm | 1000 mm | Black, RAL 9005 |
| 309313 | RS Élite floor-standing with perforated doors | 48    | 2224 mm | 600 mm | 1000 mm | Black, RAL 9005 |
| 309312 | RS Élite floor-standing with perforated doors | 42    | 1957 mm | 800 mm | 1000 mm | Black, RAL 9005 |
| 309314 | RS Élite floor-standing with perforated doors | 48    | 2224 mm | 800 mm | 1000 mm | Black, RAL 9005 |

Other dimensions and configurations are available on request.

## Accessories

| P/N    | Description                       | Height  | Width | Depth    | Color           |
|--------|-----------------------------------|---------|-------|----------|-----------------|
| 309342 | Brush for the cable entry (2 pcs) | 10.4 mm | 50 mm | 301 mm   | Black, RAL 9005 |
| 309338 | Bracket for 2 PDU's for 42U/48U   | 1760 mm | 29 mm | 190.5 mm | Black, RAL 9005 |