


RS Élite IP20 600/800x1200 - Free standing

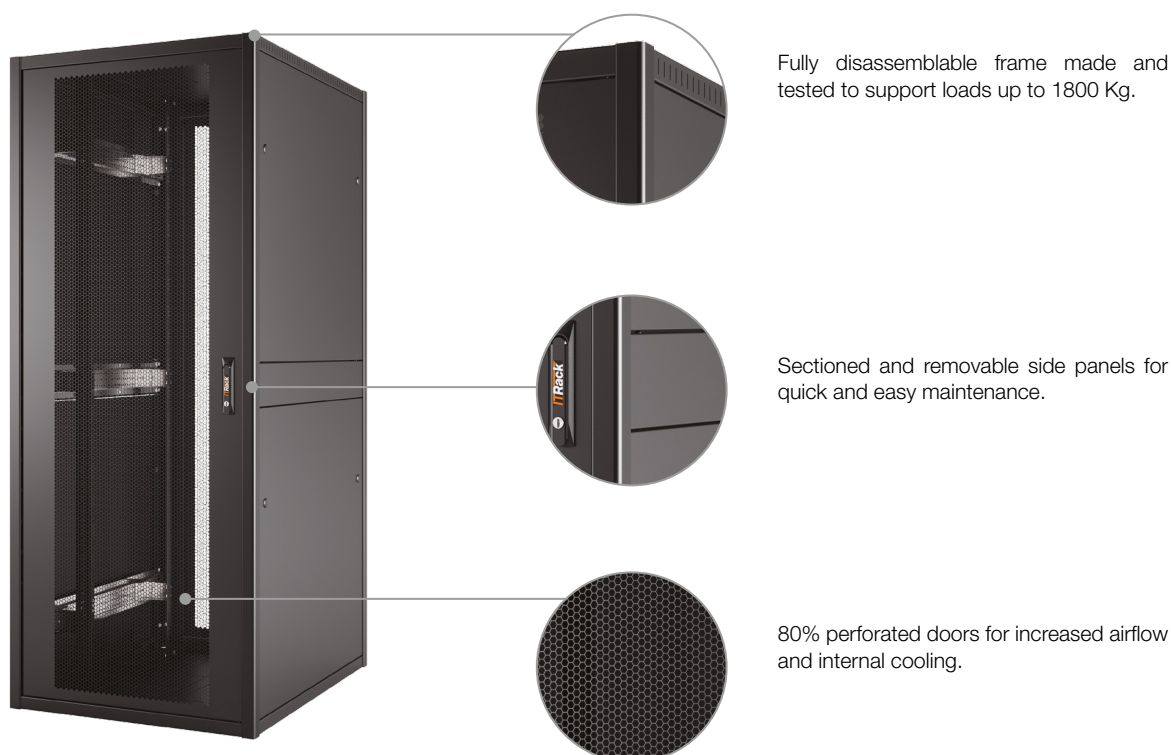

Description

The RS Élite Series has been designed to accommodate high-density servers. These cabinets ensure protection, connection, cooling and power supply, offering significant savings on infrastructure costs by allowing the enhancement of data processing in simple, fast, and space-saving manner. This series of 19" Rack Cabinets is ideal for creating the infrastructures typically required in Data Centre, Micro Data Centre, Datacom, as well as IT & Networks.

Technical features

The modular structure is made using 3.0 mm three-way joints welded to the base and roof assembled with 4 supporting profiles in 2.0 mm thick steel sheet. Cabinets are equipped with reversible single, or mesh doors with 80% perforation, swivel handle with key, 4 vertical 19" uprights with numbered units (RU's) and adjustable in depth. Cabinets are supplied fully assembled, but on request, they can be available in flat pack.

Technical specifications


| | | | |
|-----------------------|-------------------------------------------------|-----------------------------|--------------------------------------------|
| Structure | Modular and disassemblable | Cable entry | Pre-cut, in base and roof (optional brush) |
| Material | 2.0 mm steel sheet | PDU bracket | 2xPDU (optional)) |
| Static load | 1800 Kg | Ventilation | Natural or forced (up to 4 fans) |
| 19" Uprights | 4 pcs, C=2.00 mm, 19" as per IEC 60297-1-2 | Color | Black RAL 9005* |
| Front door | 80% perforated | Coating | Epoxy powder |
| Rear door | Split perforated 80% | Degree of protection | IP20 according to EN 60529 |
| Side panels | Sectioned and removable with 1.0 mm ¼-turn lock | Conformity | RoHS 2 Directive 2011/65 /EU |
| Levelling feet | M10x43 mm | Warranty | 2 years |

*Available in white RAL 9016 on request


RS Élite IP20 600/800x1200 - Free standing

Construction drawing

- 1 Modular and disassemblable structure
- 2 Depth adjustable 19" uprights with numbered units (RU's)
- 3 80% perforated door with swivel handle
- 4 80% perforated split door with swivel handle
- 5 Sectioned and removable side panels
- 6 Cable entry from base and roof
- 7 Allows the installation of ventilation kit
- 8 Levelling feet

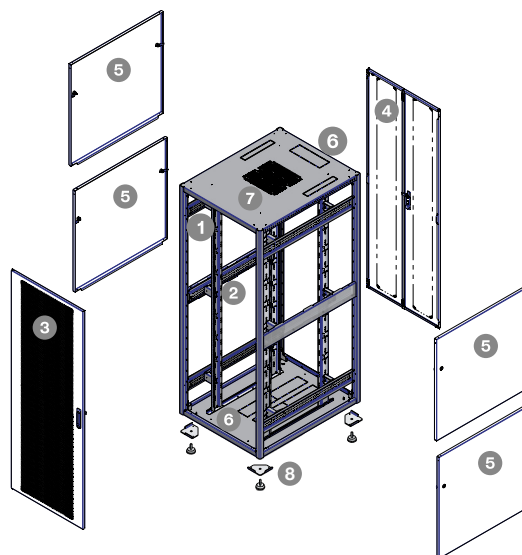

Dimensions

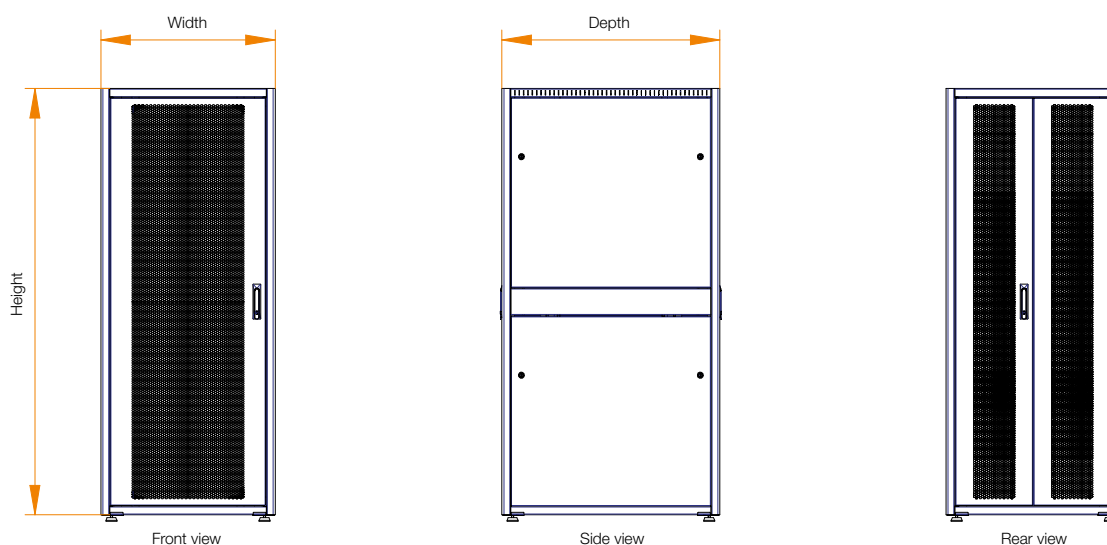

Versions

| P/N | Description | Units | Height | Width | Depth | Color |
|--------|-----------------------------------------------|-------|---------|--------|---------|-----------------|
| 309319 | RS Élite floor-standing with perforated doors | 42 | 1957 mm | 600 mm | 1200 mm | Black, RAL 9005 |
| 309321 | RS Élite floor-standing with perforated doors | 48 | 2224 mm | 600 mm | 1200 mm | Black, RAL 9005 |
| 309320 | RS Élite floor-standing with perforated doors | 42 | 1957 mm | 800 mm | 1200 mm | Black, RAL 9005 |
| 309322 | RS Élite floor-standing with perforated doors | 48 | 2224 mm | 800 mm | 1200 mm | Black, RAL 9005 |

Other dimensions and configurations are available on request.

Accessories

| P/N | Description | Height | Width | Depth | Color |
|--------|-----------------------------------|---------|-------|----------|-----------------|
| 309342 | Brush for the cable entry (2 pcs) | 10.4 mm | 50 mm | 301 mm | Black, RAL 9005 |
| 309338 | Bracket for 2 PDU's for 42U/48U | 1760 mm | 29 mm | 190.5 mm | Black, RAL 9005 |