


# Server IP20 600/800x1200 - Free standing

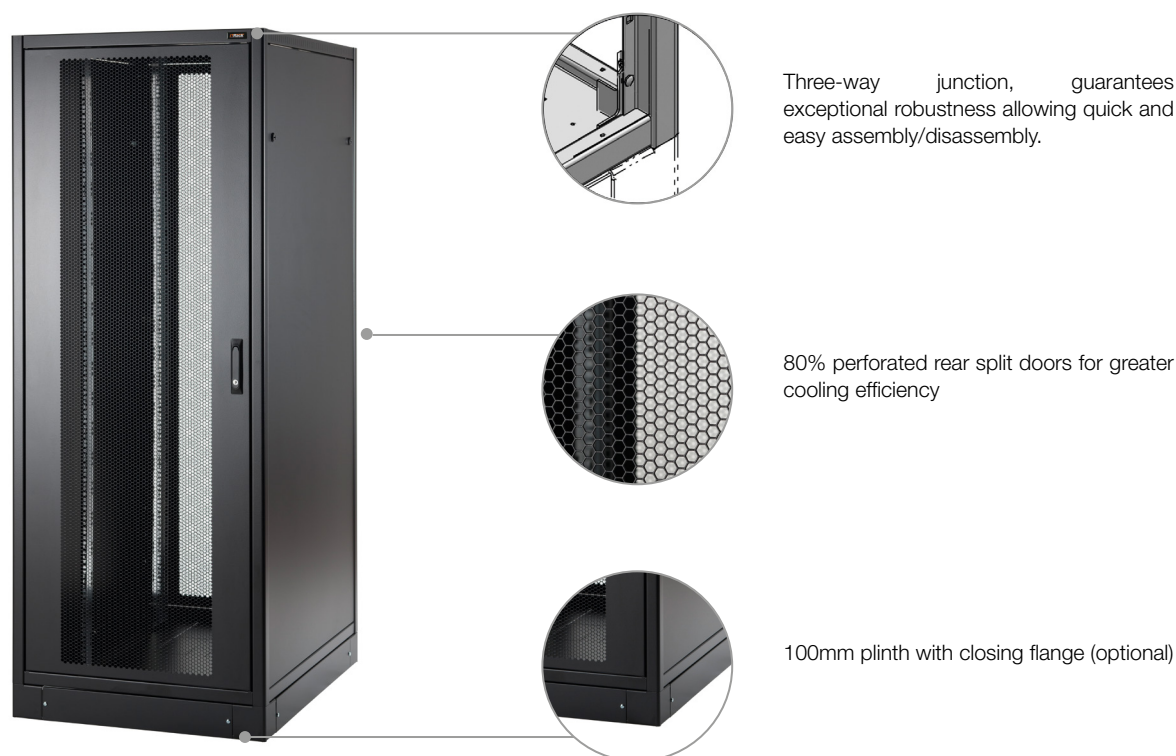

## Description

The Server Series has been designed to implement Data Centres of any size. Thanks to its sturdiness, this cabinet can support heavy load equipment such as servers, uninterruptible power supplies and equipment of any manufacturer.

## Technical features

The modular structure is made using 3.0 mm three-way joints welded to the base and roof, assembled with 4 supporting profiles in 2.0 mm thick steel sheet. Cabinets are equipped with reversible single, or split doors with 80% perforation, swivel handle with key, 4 vertical 19" uprights with numbered units (RU's) and adjustable in depth. Cabinets are supplied fully assembled, but on request, it can be available in flat pack.


## Technical specifications

<b>Structure</b>	Modular and disassemblable	<b>Levelling feet</b>	4 pcs of M10x35 mm
<b>Material</b>	2.0 mm steel sheet	<b>Cable entry</b>	Pre-cut, base and roof (optional brush)
<b>Static load</b>	1000 Kg	<b>Ventilation</b>	Natural or forced (up to four fans)
<b>19" Uprights</b>	4 pcs, C=2.00 mm, 19" as per IEC 60297-1-2	<b>Color</b>	Epoxy powder Black RAL 9005
<b>Front door</b>	Perforated 80%	<b>Protection degree</b>	IP20 as per EN 60529
<b>Rear door</b>	Split perforated 80%	<b>Conformity</b>	RoHS 2 Directive 2011/65 / EU
<b>Side panels</b>	Removable, 1.0 mm steel sheet, with ¼ turn lock	<b>Warranty</b>	2 years


# Server IP20 600/800x1200 - Free standing

## Construction drawing

- 1 Modular and disassemblable structure
- 2 Depth adjustable 19" uprights with numbered units (RU's)
- 3 80% perforated door with swivel handle
- 4 80% perforated split door with swivel handle
- 5 Removable side panels
- 6 Cable entry from base and roof
- 7 Allows the installation of ventilation kit
- 8 Levelling feet

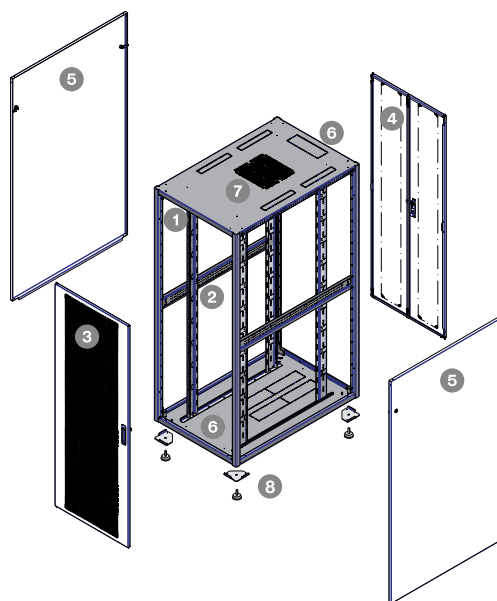

## Dimensions

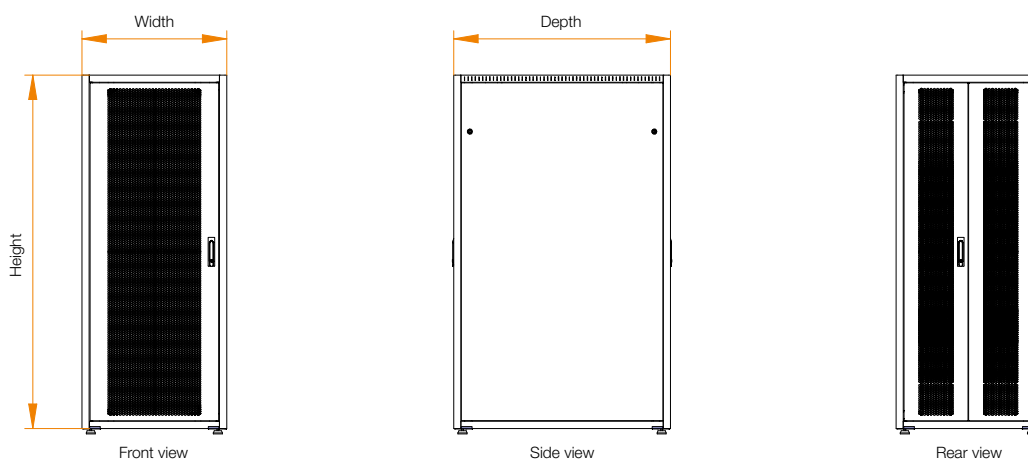

## Versions

P/N	Description	U	Height	Width	Depth	Color
309327	Server IP20 with perforated doors	42	1957 mm	600 mm	1200 mm	Black, RAL 9005
309329	Server IP20 with perforated doors	48	2224 mm	600 mm	1200 mm	Black, RAL 9005
309328	Server IP20 with perforated doors	42	1957 mm	800 mm	1200 mm	Black, RAL 9005
309330	Server IP20 with perforated doors	48	2224 mm	800 mm	1200 mm	Black, RAL 9005

Other dimensions and configurations are available on request.

## Accessories

P/N	Description	Height	Width	Depth	Color
309342	Brush for the cable entry (2 pcs)	10.4 mm	50 mm	301 mm	Black, RAL 9005
309336	Plinth kit with sealing flanges	100 mm	600 mm	1200 mm	Black, RAL 9005
309337	Plinth kit with sealing flanges	100 mm	800 mm	1200 mm	Black, RAL 9005